

# RS FORMULA V2

This instruction is developed to assist you in assembling of RSEAT RS FORMULA V2 Speakers Mount

Language: **EN**



## SPEAKERS MOUNT ASSEMBLY INSTRUCTIONS RS FORMULA V2 EN

### **⚠** WARNINGS

Before you begin assembling this simulator, please read all installation instructions and warnings thoroughly.

**FAILURE TO COMPLY WITH OR OBSERVE ALL ASSEMBLY, SAFETY AND OPERATION INSTRUCTIONS AND WARNINGS REGARDING THE USE OF THIS PRODUCT MAY RESULT IN SERIOUS BODILY INJURY.**

This simulator complies with the prescribed safety regulations. Inappropriate use may cause damage to persons and simulator.

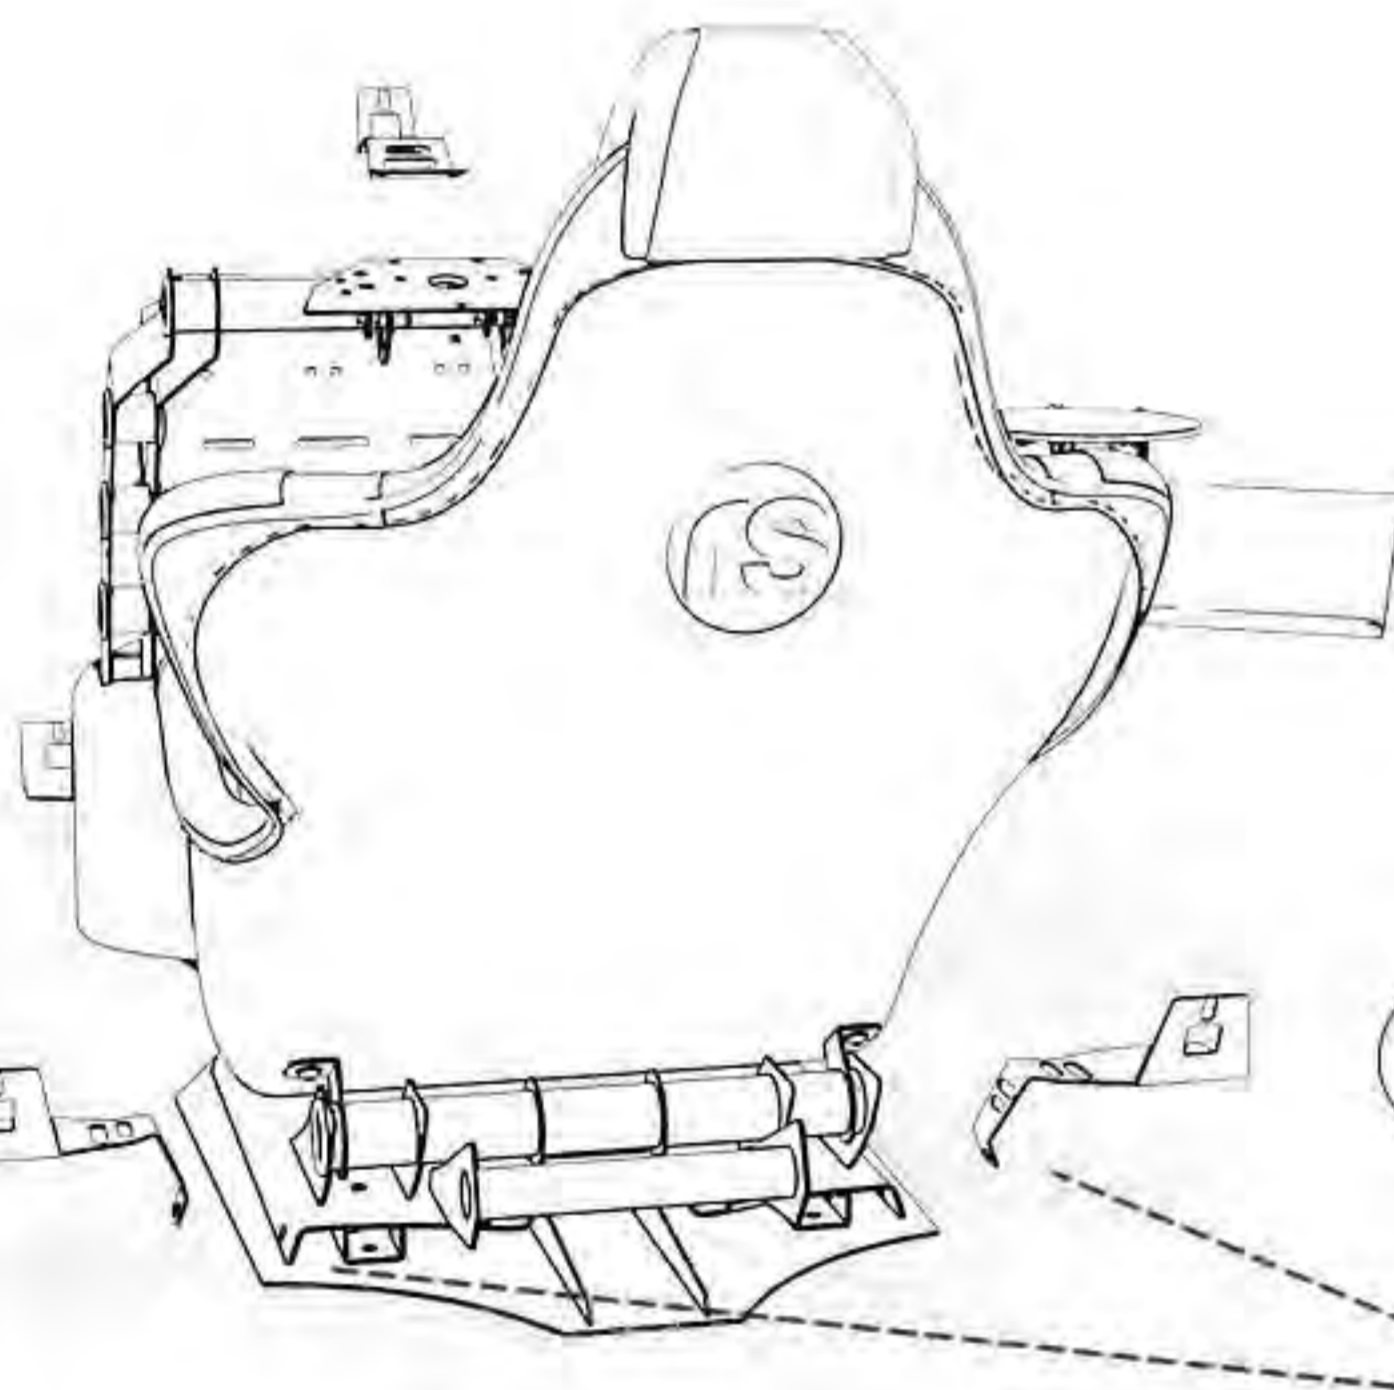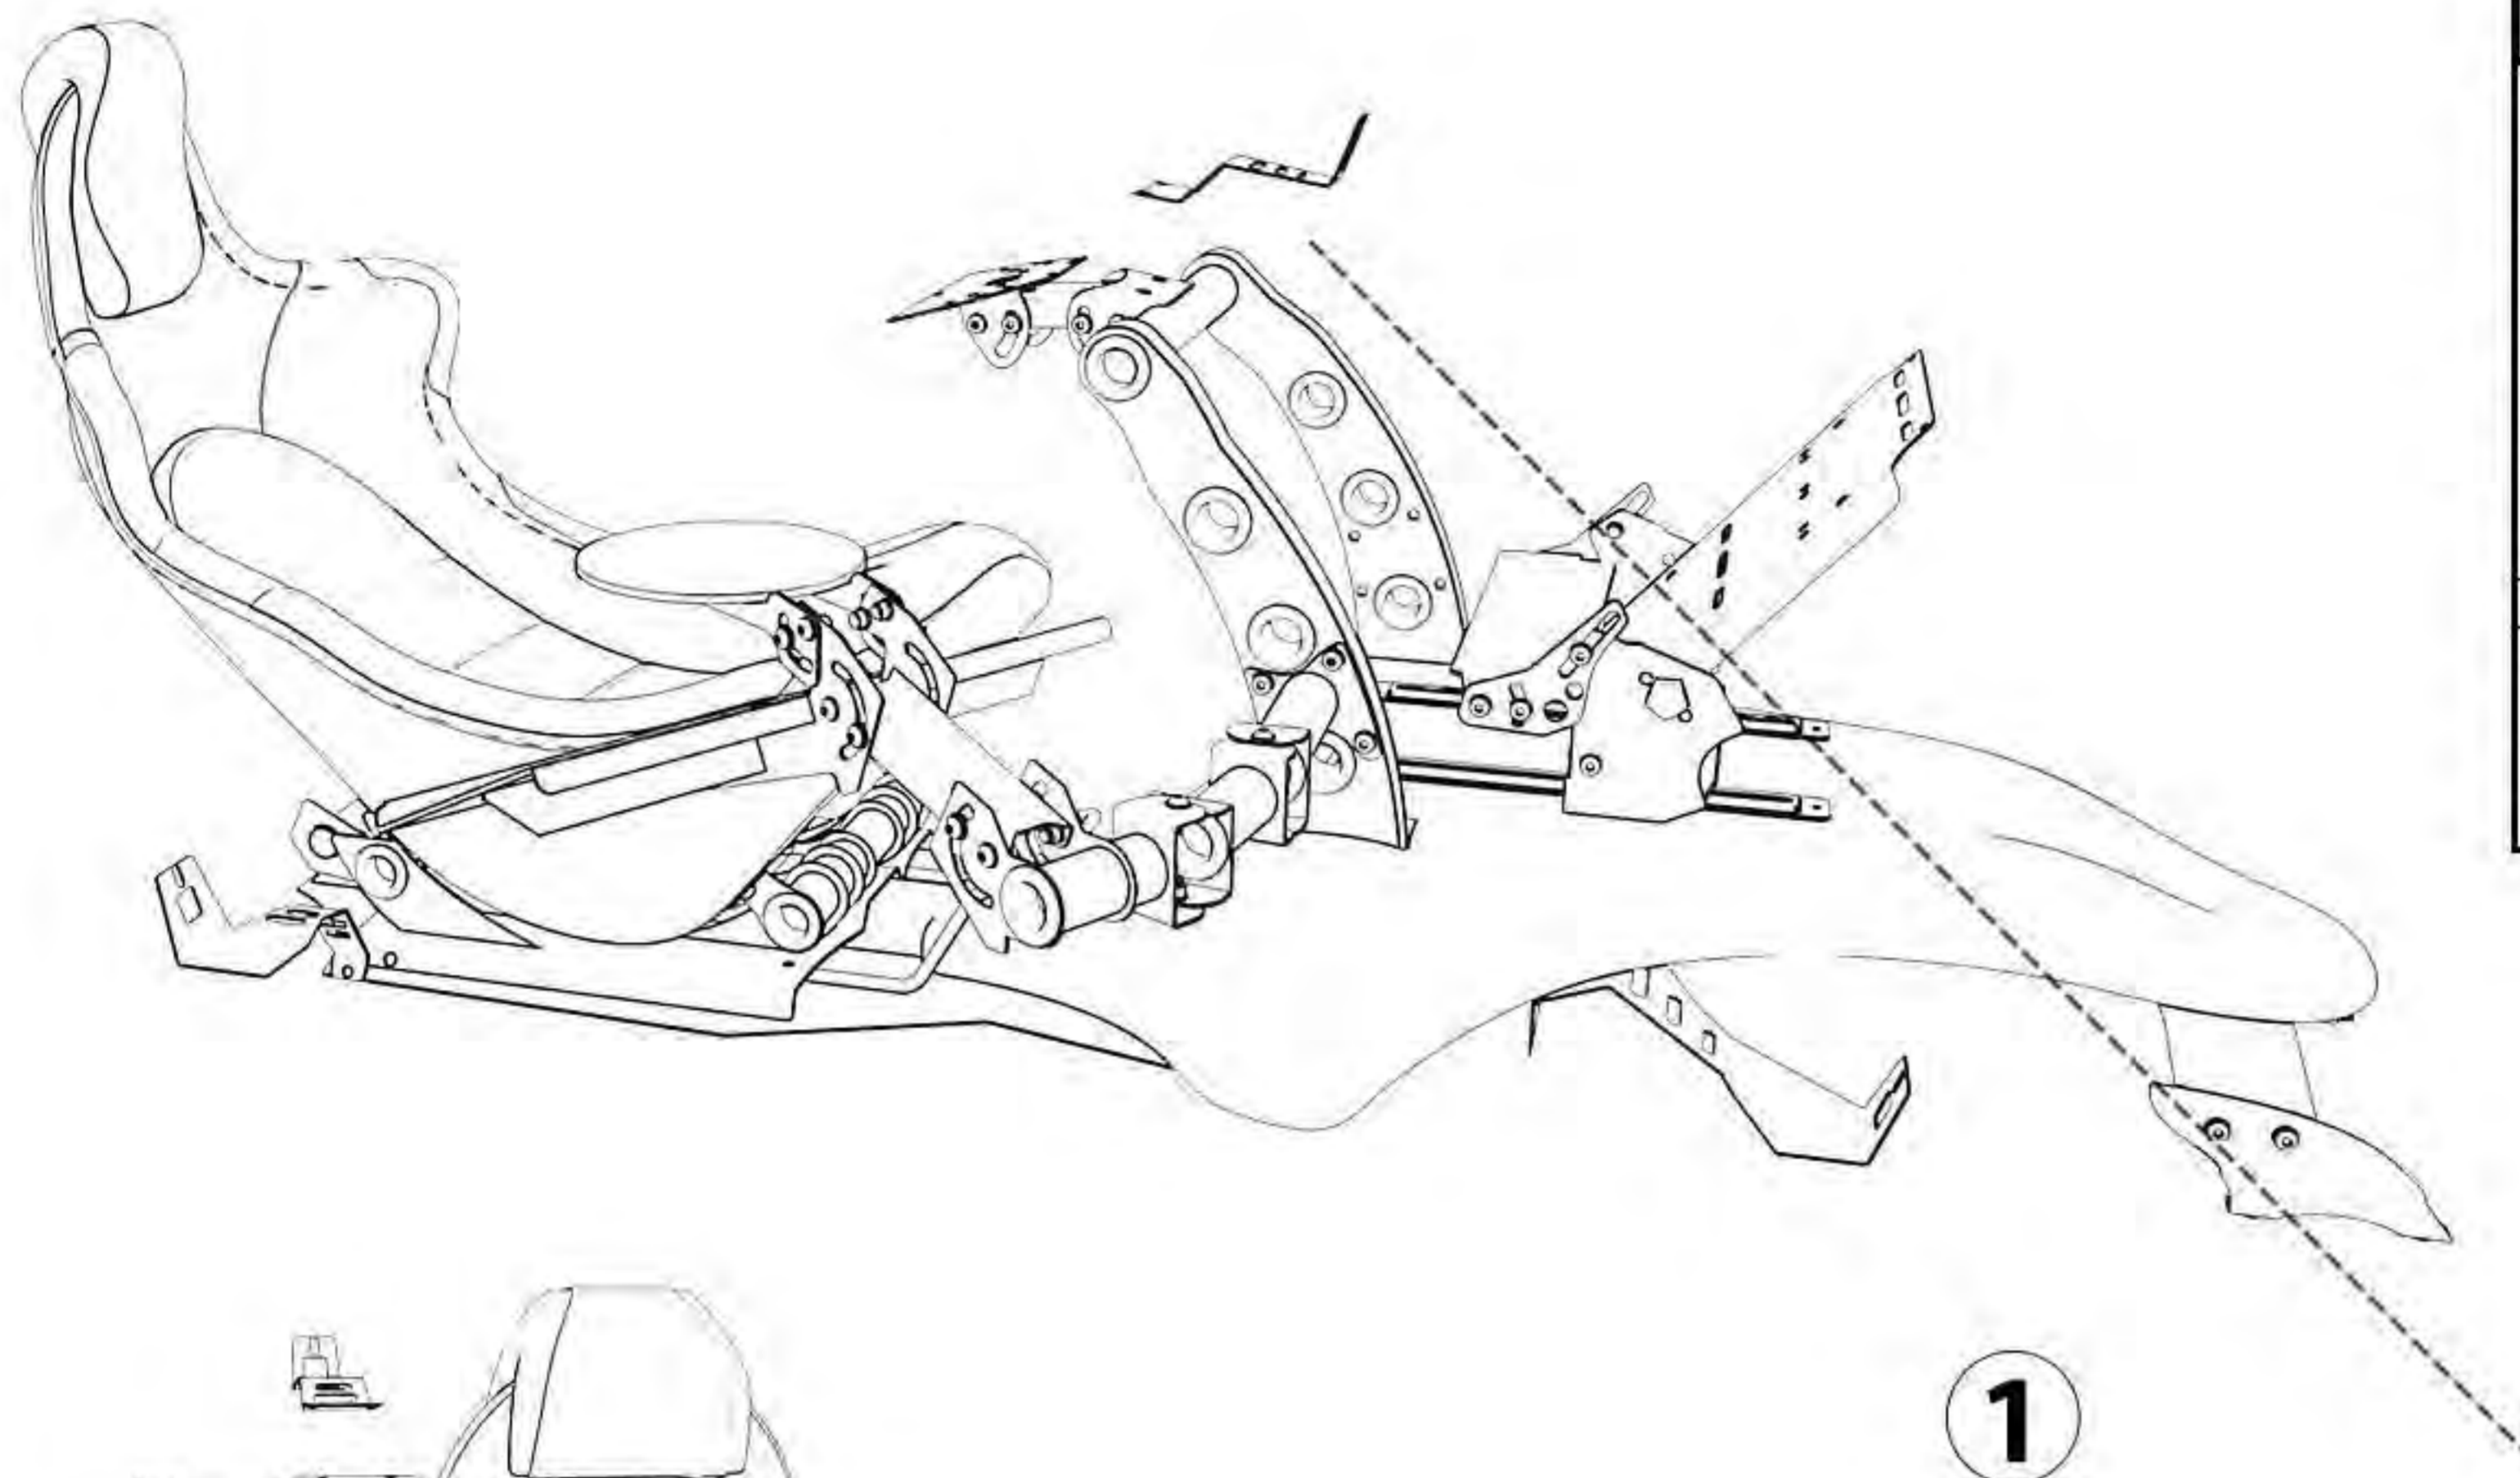

**2** Locate the rear speakers mounts as on the image. Align with the holes on the RS Formula V2 underseat plate. Screw the two M8x20 screws provided with the kit as on the image.

### **3**

#### Step 1

Unscrew the front two bolts on the beam as on the image

#### Step 2

Set the plate in position to align with the pre drilled holes and insert the bolts back and tight with the provided wrench.

