


RS STAND T3L V2

ASSEMBLY INSTRUCTIONS
RSEAT RS STAND T3L V2


This instruction is developed to assist you in assembling
of RSEAT T3L V2 Triple screen stand

Language: **EN**

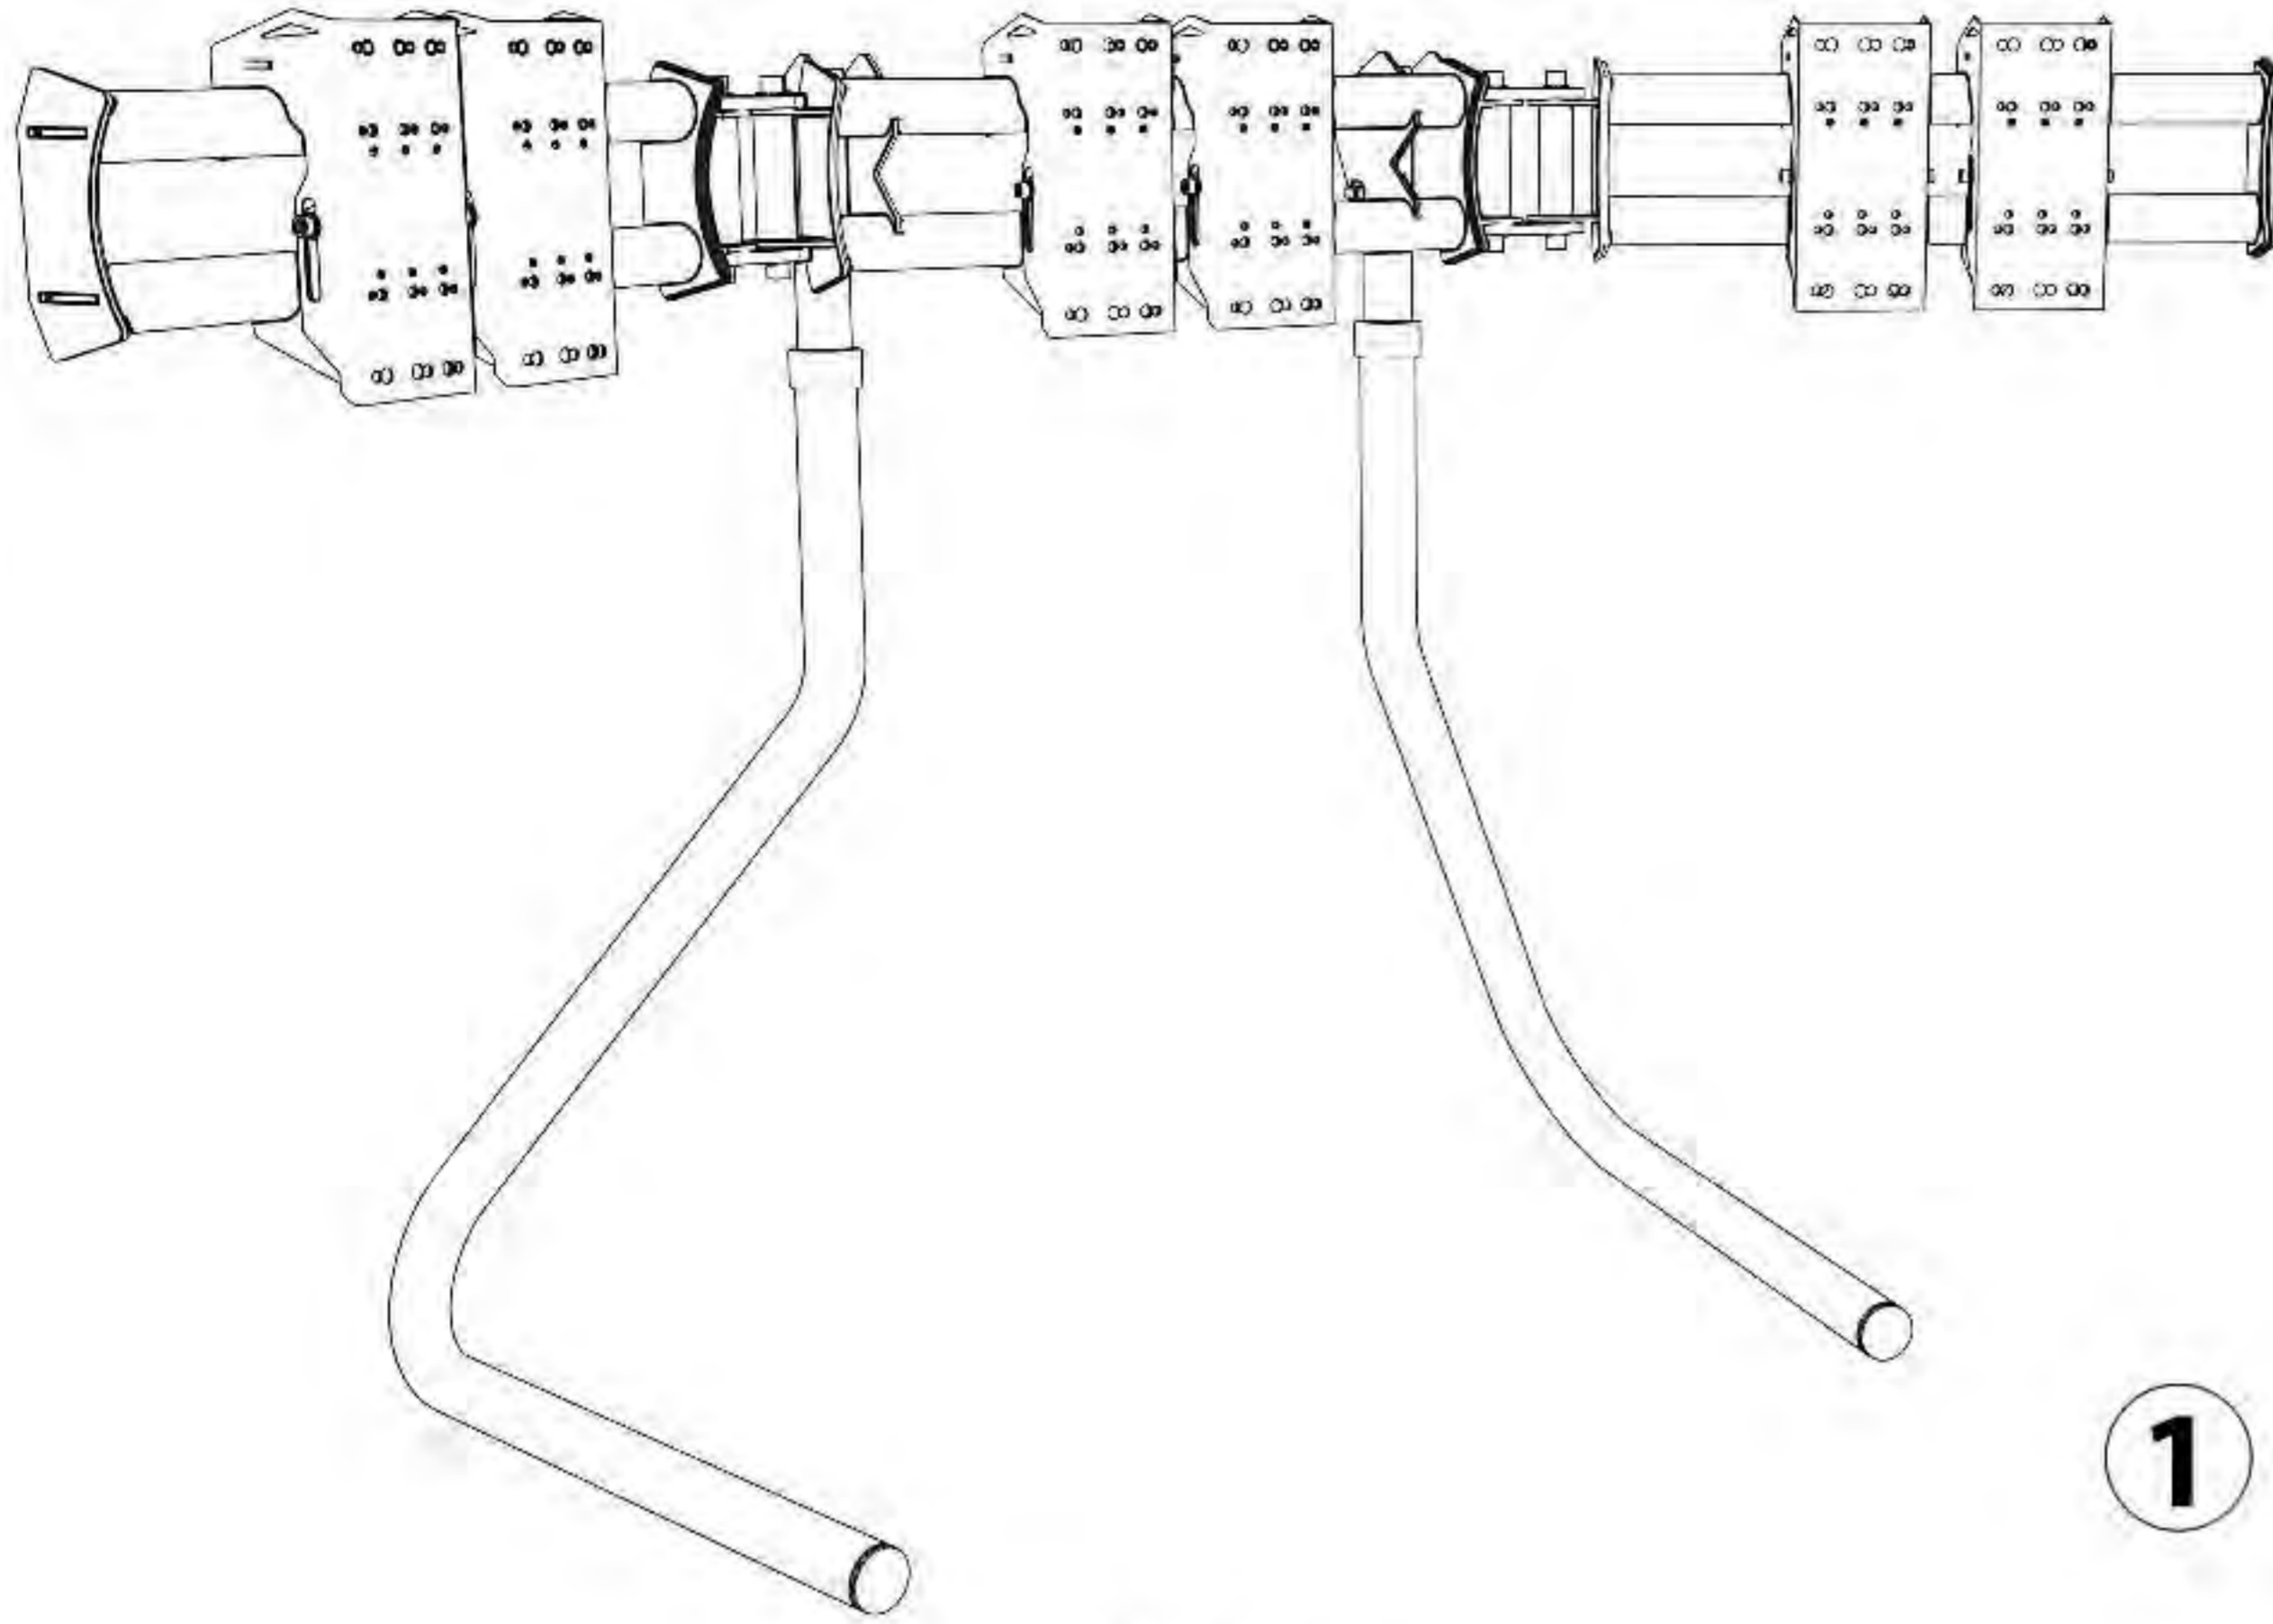

1

Put the parts on a flat surface.
Assemble the stand hinges as shown on the
image below. To lock the hinges just tighten
the screws.

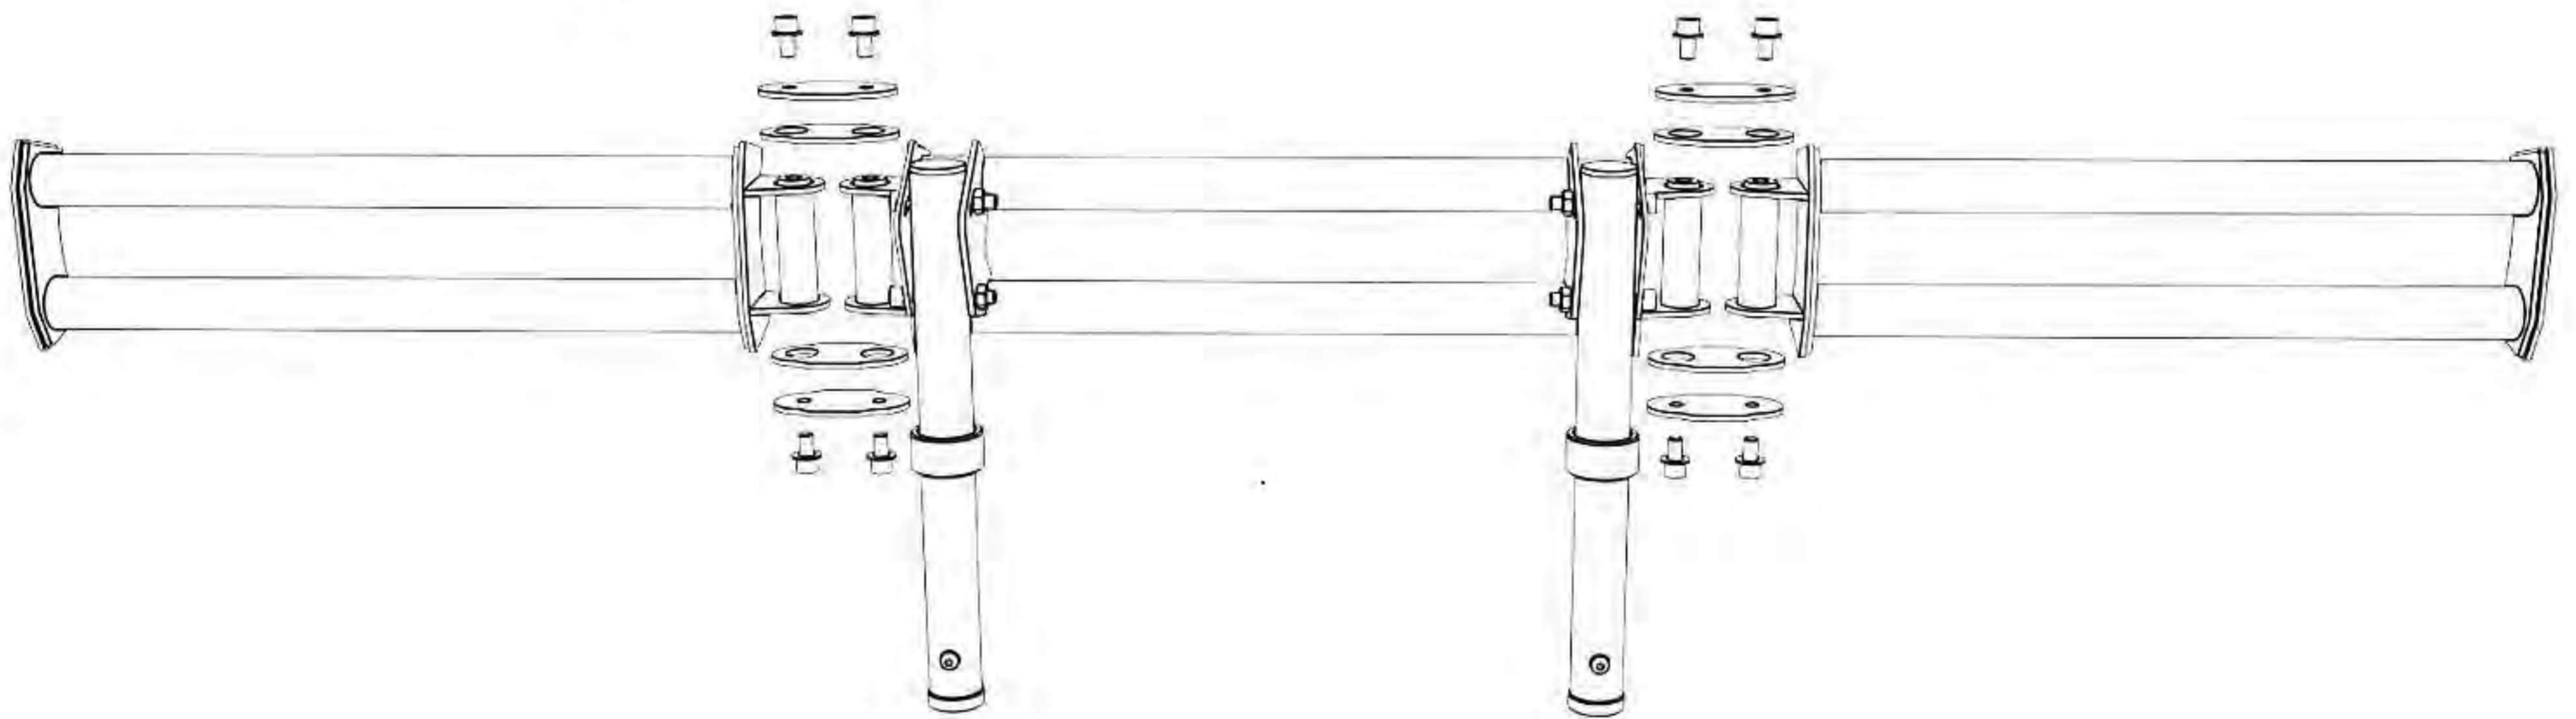


2

Assemble the legs with the stand
as shown on the image.

Set the stand's height and
screw the fixation bolt

⚠ WARNINGS
Before you begin assembling this tv/monitor stand, please read all installation instructions and warnings thoroughly.
FAILURE TO COMPLY WITH OR OBSERVE ALL ASSEMBLY, SAFETY AND OPERATION INSTRUCTIONS AND WARNINGS REGARDING THE USE OF THIS PRODUCT MAY RESULT IN SERIOUS BODILY INJURY.


This product complies with the prescribed safety regulations. Inappropriate use may cause damage to persons and tv/monitor stand.

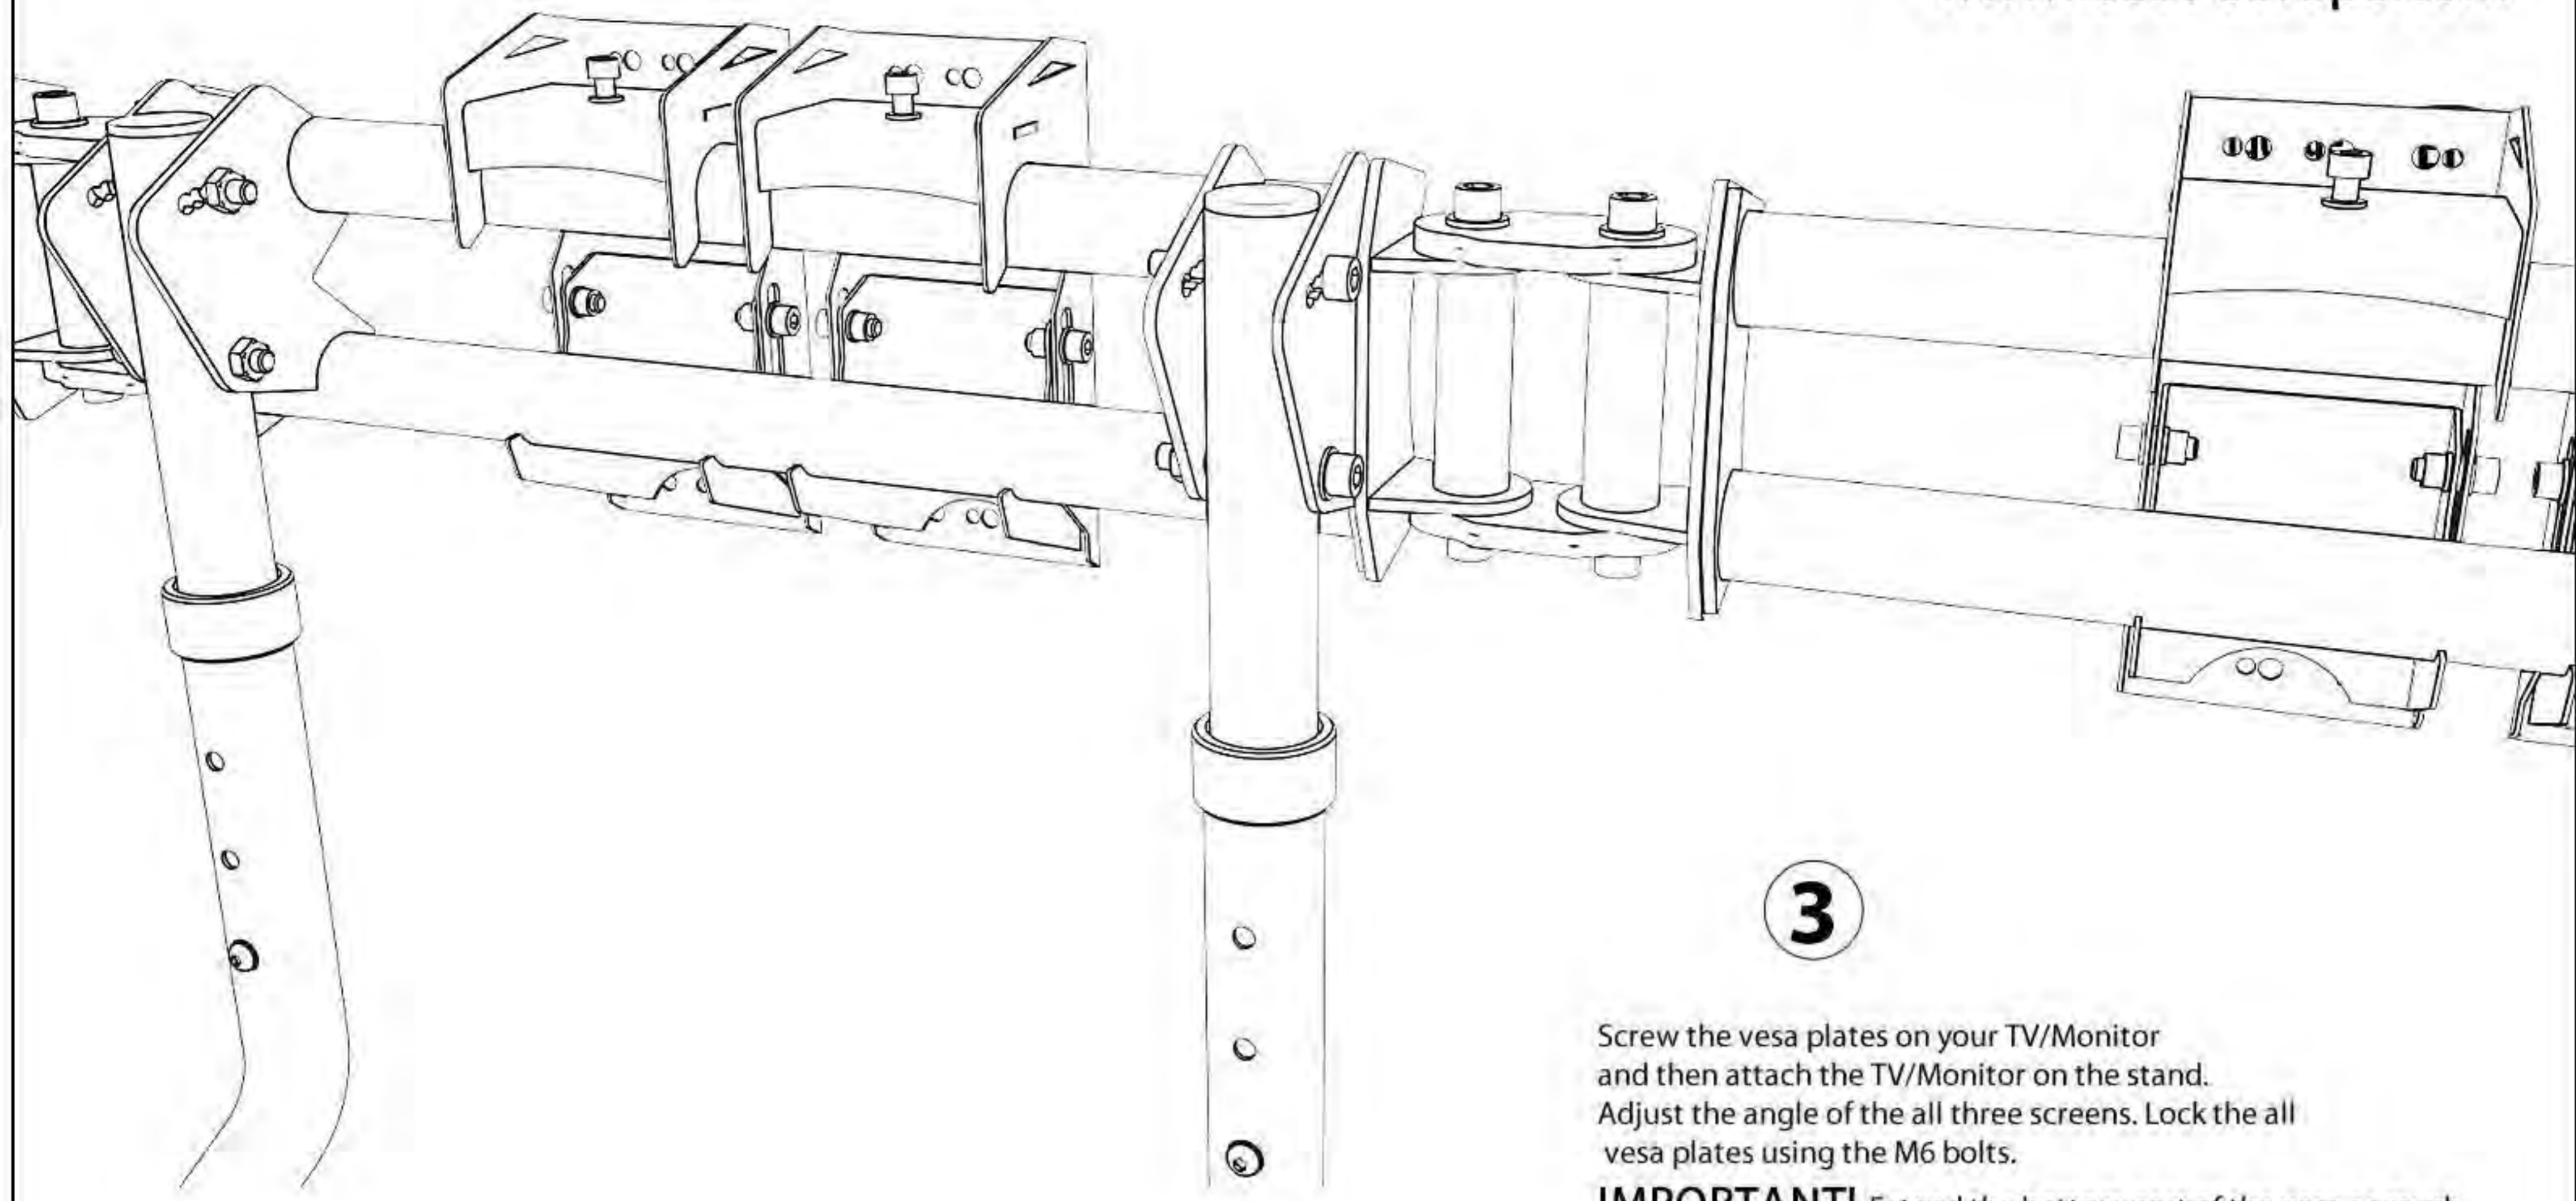



3

Screw the vesa plates on your TV/Monitor and then attach the TV/Monitor on the stand. Adjust the angle of the all three screens. Lock the all vesa plates using the M6 bolts.

IMPORTANT! Extend the bottom part of the vesa as much as possible before you install the TV on the stand.

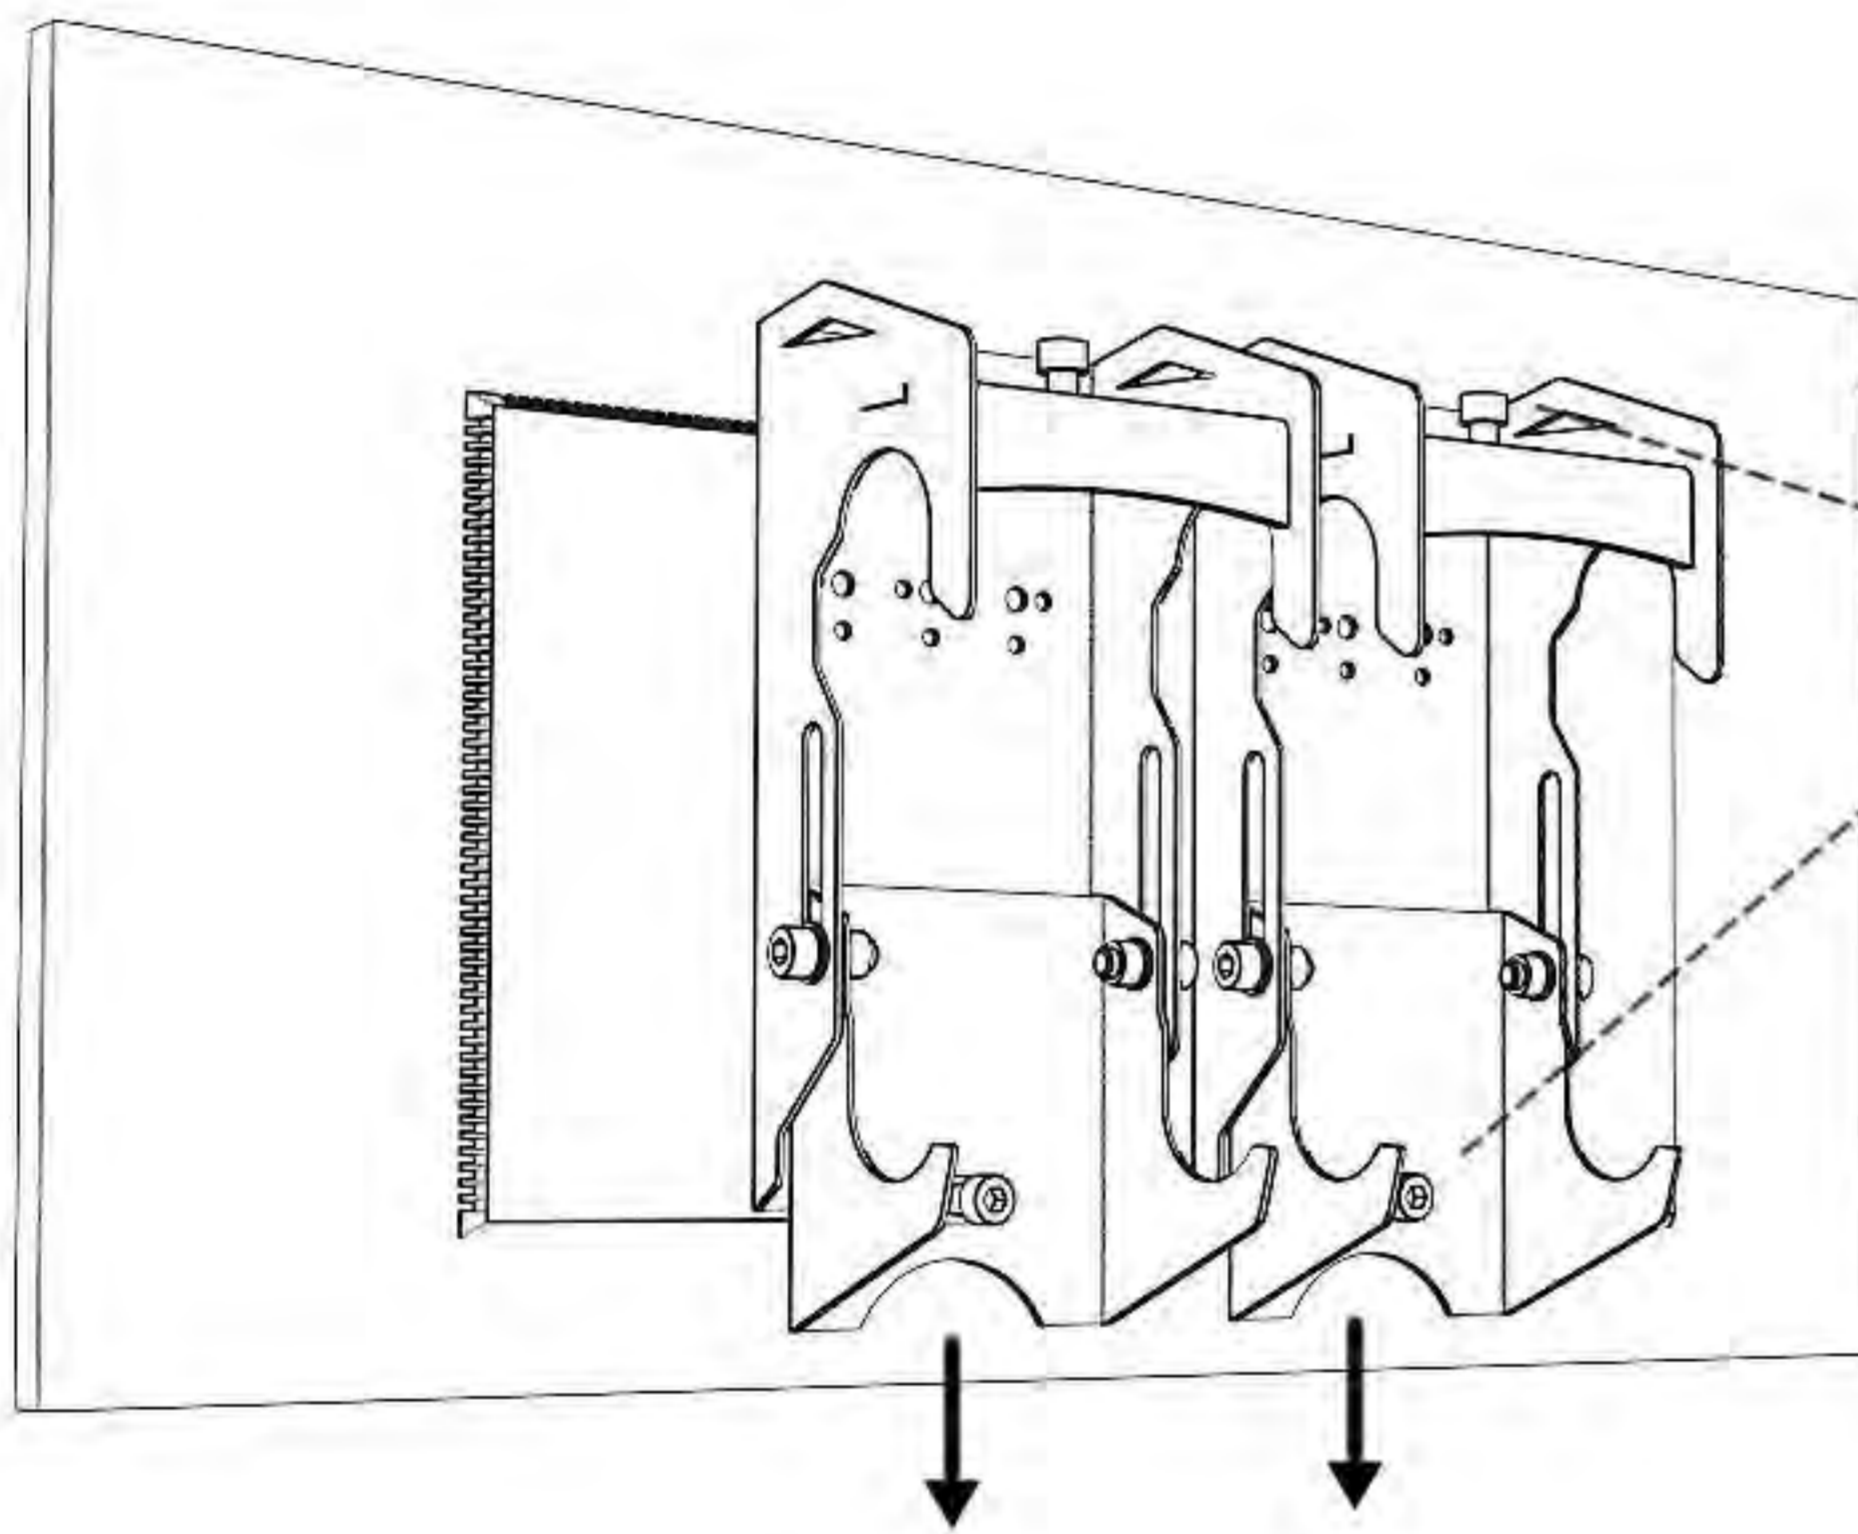

After the tv is on the stand you can adjust the tilt and height of each vesa from this M8 screws. This helps to precise align each TV/monitor .

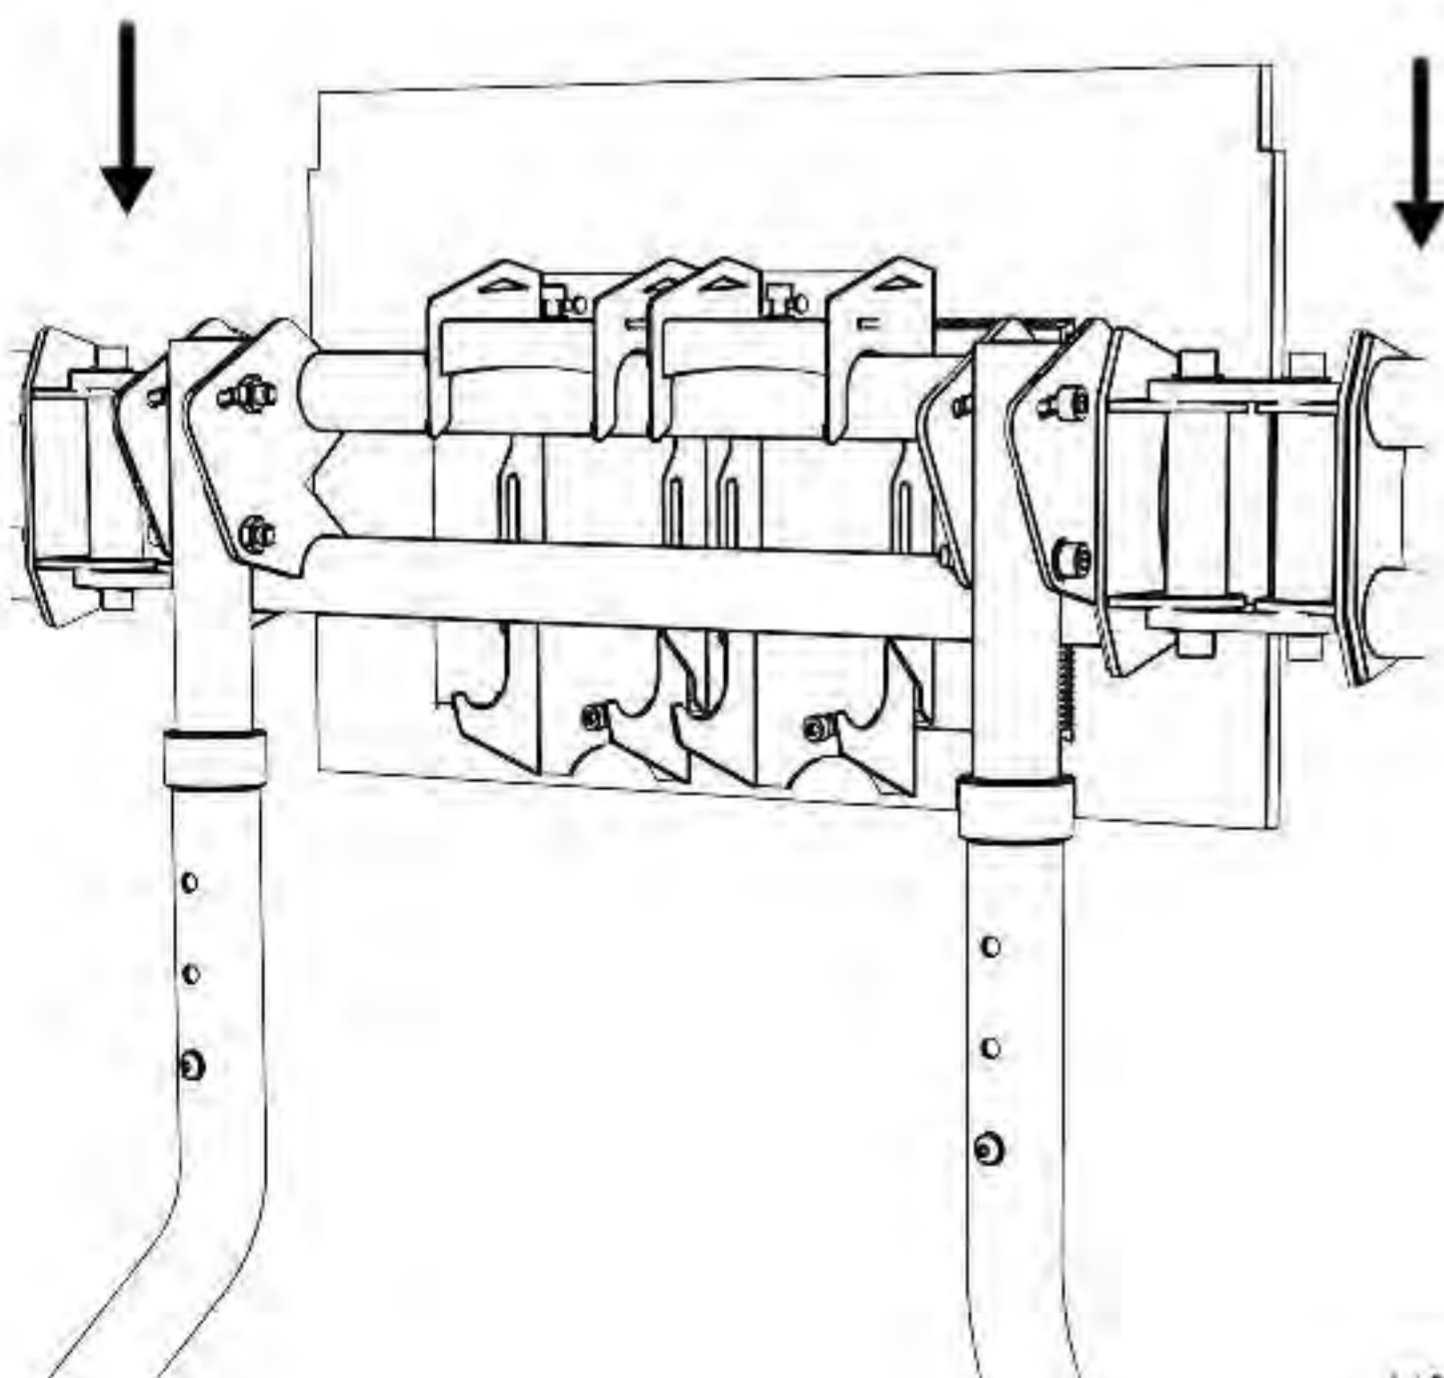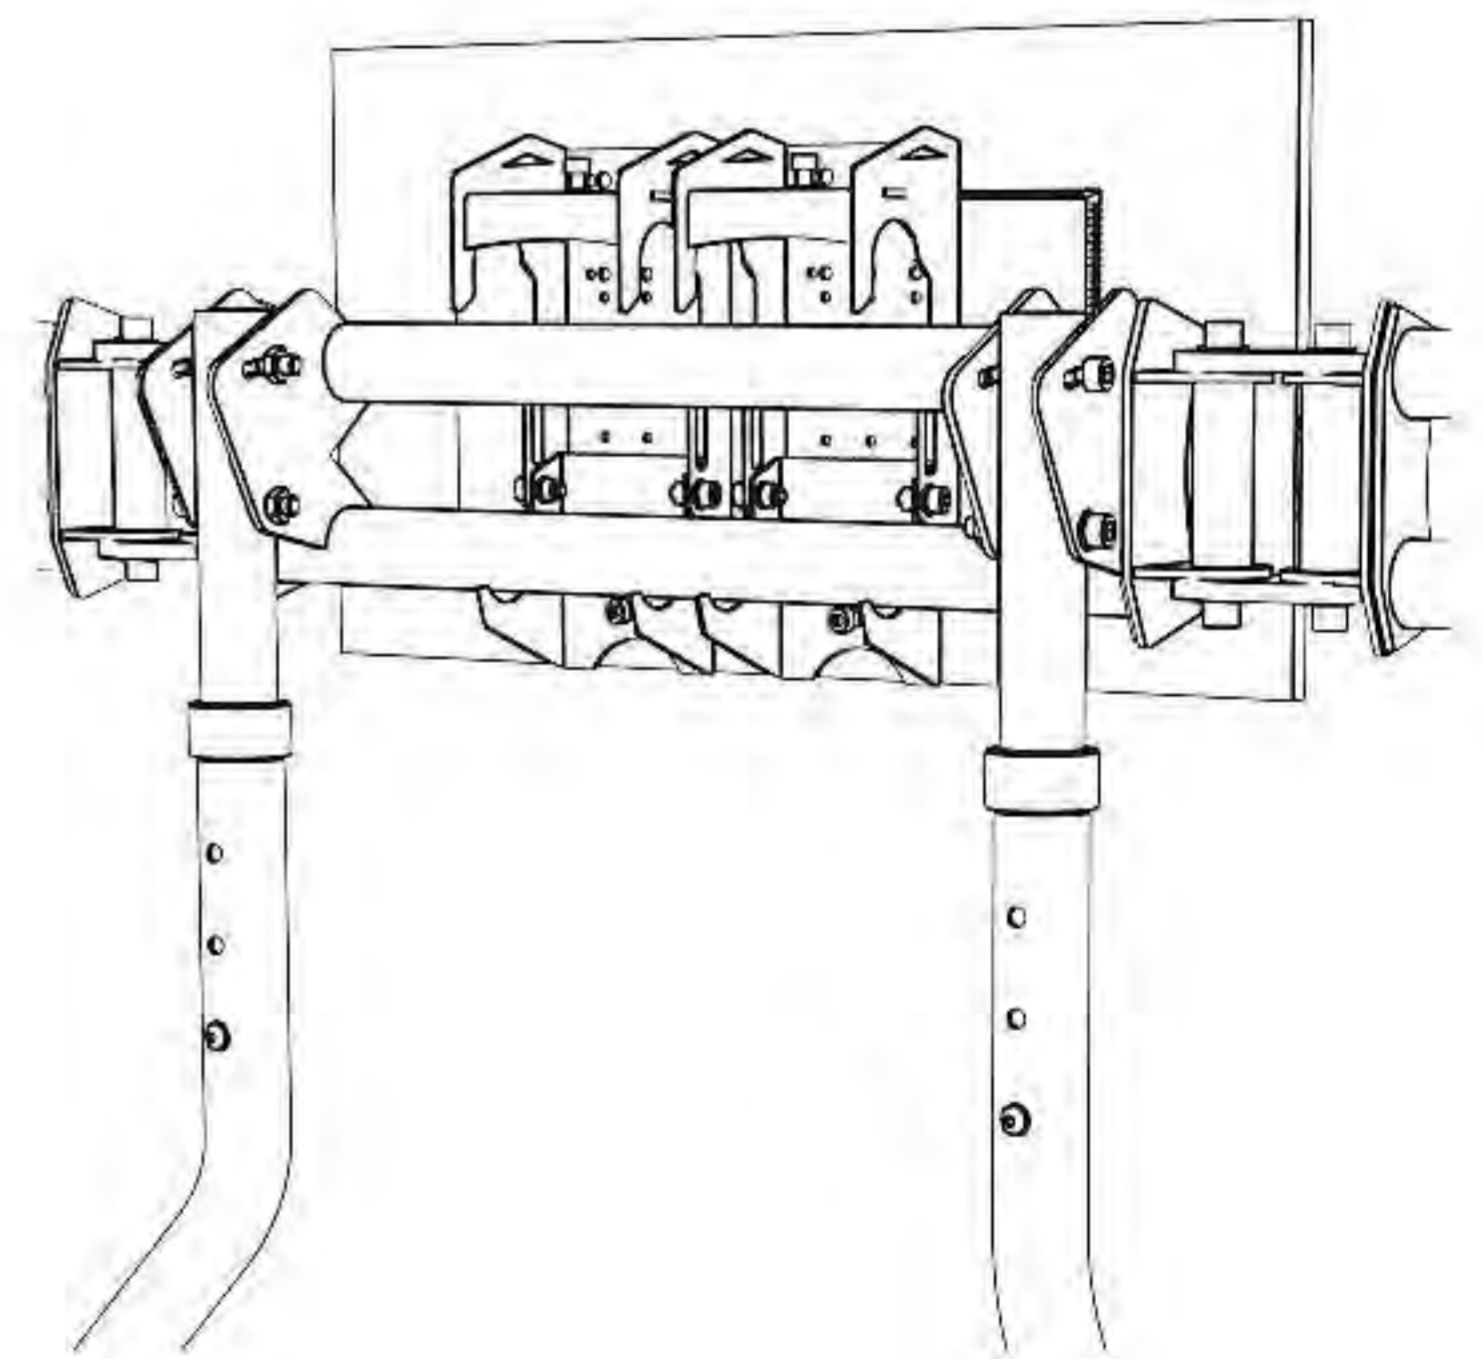

4

Lift the bottom part of the vesa to lock the TV/Monitor on place. Tighten the screws.

